



Core Alignment fusion splicer

Z2C



Fast, Capable, Practical

Fast Splicing 6s / Heating 15s
Splicing loss SMF 0.02dB (Typical)



Touch optimised
user interface and
high resolution display



Proven field
toughness



Long life battery
for 300 splice
& heat cycles

Specifications

Items	Z2C	
Optical fiber requirements	Material	Silica glass
	Fiber count / Profile types	Single / SMF(G.652), MMF(G.651), DSF(G.653), NZDSF(G.655), BIF(G.657)
	Fiber diameter	Cladding diameter : 80 - 150µm, Coating diameter : 100 - 1,000µm
Standard performance	Cleave length	5 - 16mm with coating clamp
	Splice loss (typical)*1	SMF : 0.02dB, MMF : 0.01dB, DSF : 0.04dB, NZDSF : 0.04dB
	Return loss (typical)	60dB or greater
	Splice time (typical)	6sec(SM G652 Quick Mode), 8sec(Auto Mode)
	Heating time (typical)	15sec (FPS-61-2.6 sleeve, S60mm 0.25)
	Splice & Heat cycles per battery full charge*2	Approx. 300 (BU-16)
	Fiber view & magnification	2 CMOS cameras observation, 350X (zoom : 700X) for X or Y single axis view, Max. 350 for both X & Y dual axis view
Programs	Proof test	1.96 - 2.09N
	Applicable protection sleeve	60mm, 40mm & Sumitomo Nano sleeves
	Splice programs	Max. 300, 40 are pre-optimised, 260 editable by user
Functions	Heating programs	Max. 100, 23 are pre-optimised, 77 editable by user
	Splice image capture / Splice data storage	200 images / 10,000 splice data (internal memory only) 50,200/20,000 (with 16GB SD card)
	Universal clamps	Provided, 250µm, 900µm tight & loose buffer fiber
	Reversible coating clamps	Provided
	Onboard user training video	Provided
	Automatic fiber identification	SMF / MMF / Other
	Automatic arc calibration	Automatically compensates for environmental condition changes
Size / Weight	Display of remaining Splice & Heat cycles	Provided (Battery mode)
	Size	128(W) x 154(D) x 130(H) mm (without anti-shock rubber)
	Weight	1.7kg (without Battery) / 2.0kg (with Battery BU-16)
Terminals	Monitor	5.0" touch screen color LCD display
	DC output	DC 12V (for JR-6)
	USB port	USB 2.0 (mini-B type)
Power supply	Storage media	SD / SDHC memory card MAX32GB
	AC input	AC 100 - 240V, 50/60Hz (ADC-16)
	DC input	DC 10 - 15V
Operating condition	Battery pack	Li-ion 10.8V, 6,400mAh (BU-16)
	Operating condition	Altitude : 0 - 6,000m, Temperature : -10 - +50°C, Humidity : 0 - 95% (non-condensing), Wind velocity : up to 15m/sec
Storage condition	Temperature : -40 - +80°C, Humidity : 0 - 95% (non-condensing), Battery : -20 - +30°C (long term)	
Electrode life *3	6,000 arc discharges	
Software updates	Internet	
Data management	Can be stored, edited and analyzed by dedicated PC software	

*1 : Average value of the final inspection in room temperature with Sumitomo identical fiber. Measured by cut-back method relevant to ITU-T and IEC standards.

*2 : Splice & Heat cycles may vary depending on the battery status and the operating environment.

*3 : Achieved in lab condition. Electrode life may vary depending on the operating environment.

Environmental Durability*

Test details	Test details
Shock resistance	Drop from 76cm on 5 faces (excluding top face)
Impact resistance	Equivalent to IK07 on LCD monitor (Protected against 2J impact, it is equivalent to a 500g force from 40cm)
Water resistance	Equivalent to IPX2 (Operates normally after being exposed to water dripping at 3mm/min. for at least 2.5 min on each of 4 surfaces tilted at 15°)
Dust resistance	Equivalent to IP5x (Operates normally after 8 hours in a test chamber with circulating dust particles smaller than 75 µm)

*Splicer operation after shock, impact, water or dust tests, was confirmed under battery power, by Sumitomo.

Does not guarantee the product will not be damaged by these conditions.

Basic Accessories

Part name	Part No.	Qty.
AC adapter	ADC-16	1 pc
AC power cord	PC-AC<X>*	1 pc
Cooling tray	—	1 pc
Battery pack	BU-16	1 pc
Spare electrode	ER-10	1 pair
Quick reference guide	—	1 pc
Carrying case with worktable	CC-82	1 pc
Hand strap	—	1 pc
USB cable	—	1 pc

*X=2(USA), 3(EU), 5(UK/HK), 8(CHINA), 9(INDIA), 10(BRAZIL)

Items listed in the table are typical contents included with the splicer body. Overall kit content may vary regionally. Please check with your local authorised reseller to confirm kit content in your region.

Accessories

Part name	Part No.	Remarks
Fiber holder	FHS-025	For φ0.25mm single fiber
	FHS-09	For φ0.9mm single fiber
	FHS-025/LB5	For 0.9mm loose buffered single fiber
	FHD-1	For indoor / outdoor rectangular drop cable
	1SM-ST	For indoor rectangular drop cable
FHC-3	For 3mm cable	
Battery pack	BU-16	Li-ion 6,400mAh
Battery charger	BC-16	—
Car battery cable	PCV-16	Vehicle 12V outlet
V-groove cleaning brush	VGT-2	Brush for cleaning V-groove
Electrode	ER-10	—
Handheld fiber cleaver	FC-8R-FC	Auto blade rotation + cleave counter
	FC-8R-F	Auto blade rotation
Fiber cleaver	SFC-S	Table-top high precision cleaver
Jacket remover	JR-M03	Jacket remover for single fiber
Loose tube cutter	LTC-01	—
Alcohol dispenser	HR-3	—
Fiber protection sleeve	FPS-1	60mm, diameter after shrink approx. φ3.2mm
	FPS-40	40mm, diameter after shrink approx. φ3.2mm
	FPS-61-2.6	61mm, diameter after shrink approx. φ2.6mm



Carrying case with worktable
CC-82




Table-top cleaver
SFC-S



Handy cleaver
FC-8R series



Jacket remover
JR-M03

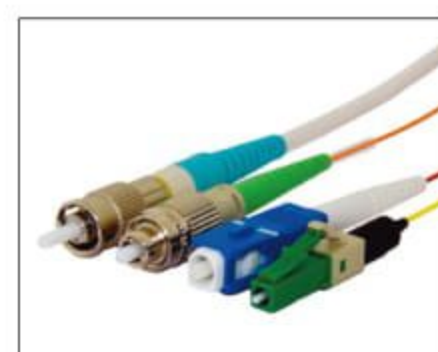

Available for
Lynx-Custom Fit™
Splice-On Connector



Electrode
ER-10

Sumitomo Electric Industries, Ltd.

Gurgaon (India)

SEI Trading India Pvt. Ltd.

802, Vatika City Point, M.G. Road,
Gurgaon 122002, Haryana, India
TEL: +91-124-4577470
<http://www.sumitomosplacers.in/>

Gurgaon (India)

SEI Trading India Pvt. Ltd.

802, Vatika City Point, M.G. Road,
Gurgaon 122002, Haryana, India
TEL: +91-124-4577470
<http://www.sumitomosplacers.in/>

Candid Optronix Pvt Ltd

A-129/2, Nirankri Colony, Delhi-9 (India)
TEL: +91-11-2704-4633, 2760-3010
Email: sales@optronix.in
<https://www.optronix.in>